

ASSA D30

Door Closer



Application

ASSA D30 series suits all types of doors; exterior, interior and fire doors that require secure and controlled closing. Door closer body is made of cast aluminium. D30 is a compression spring door closer with high quality hydraulic oil and temperature compensated valves (- 35 °c to + 45 °c).

Features

- Adjustable spring force 2-6, 5-7 EN
- Can be installed to door leaf or frame
- Max. door width 1 400 mm with spring force 2-6 EN
- Max. door width 1 600 mm with spring force 5-7 EN
- Closing and latching force can be adjusted with valves
- Adjustable arm height 14 mm
- Back check adjustable from 75° as standard
- Delayed closing between 180° - 70° as option
- Pressure relief valves for protection of the door closer
- Temperature compensated valves - 35°C - + 45°C
- Dimensions: length 303 mm, height 72 mm, depth 60 mm
- Removable body cover in several colours: silver, white, gold, brown
- Finishes available on request: NCS, RAL, stainless, brass and chrome
- Easy to install with narrow fixing of door closer body and adjustable arm
- CE-certified


ASSA[®]

ASSA ABLOY

ASSA D30

Door Closer

Adjusting latching and closing speed, delayed closing and back check

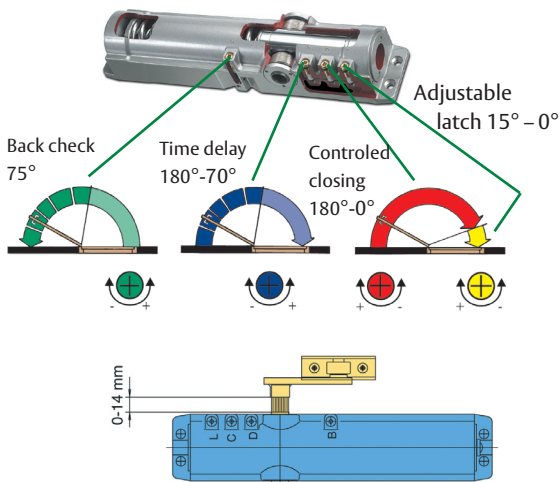

The height position of the arm can be adjusted 14 mm by lifting the axel in a vertical direction.

Accessories

D3001BC/3002BC/DC/D3003BC

Door closer body, size 2-6, 5-7 EN adjustable. Door width 1 400/1 600 mm. Latching and closing speed is adjustable with valves. Back check (BC) and delayed closing (DC option) adjustable with valves. Adjustable arm height 14 mm.



D3010/D3013/D3014

Standard arm:

D3010 frame depth 0-100 mm

Extended standard arm: D3013 frame depth 100-200 mm

D3014 frame depth 0-70 mm



D3010

D3014

D3012

Hold-open arm, frame depth 70 mm. Hold-open angle max. 150°. Blocking function can be switched on and off. (Not for fire doors).



D3012

D4020

Sliding arm can be used if design is desired. Hold-open accessories D4022 not fire doors.



D4020

D4023

Opening damper D4023 for sliding arm D4020.




D4022

D4023

D3030/D3032

Mounting plate D3030, can be used for a narrow frame or rebated door leaf. Mounting plate Universal D3032 can be used where a door closer has been mounted.



D3030

D3032

D3035

Angle mounting plate for mounting on frame side, when a non-protruding standard arm is required.



D3035

D3036

Angle mounting plate can be used when the frame depth exceeds 200 mm.



D3036

ASSA®

ASSA ABLOY

ASSA ABLOY, the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA AB
P.O. Box 371
SE-631 05 Eskilstuna
Sweden

phone +46 (0)16 17 70 00
fax +46 (0)16 17 70 49

Customer support:
phone intl. +46 (0)16 17 71 00
phone nat. 0771-640 640
fax +46 (0)16 17 73 72
e-mail: helpdesk@assa.se

www.assa.se